

Rig Engineering Final Package

2 - Fixture Information

3 - Dimmable Power Hookup

4 - Non-Dim Power Hookup

5 - Distros

6 - Mult Runs

7 - Wells Circuits

8 - Wells Plan View Circuits

9 - User Field

10 - Address Assignment

11 - Universe Information

12 - Node + Switch Information

13 - DMX Address Hookup

23 - Instrument Schedule

Wells 2022 Fixture Information

XOTCHIL MUSSER

Qt.	Type	V	Voltage Info	Amperage	Wattage	PWR to fixture	PWR to plug	Data Connector	Data Profile	Address foot print	Notes
10	ETC D40 LustrSELL40	120	100-240 VAC 50/60 Hz	0.88	104	PowerCON	L5 or UGR	5-Pin DMX	HSIC + Strobe	6	10 TOTAL IN CHAIN (15V)
54	Color Kinetics C-200	24	24V DC	12.5	300	UGR	UGR	RJ45 data connectors	-	3	MULTI OUTPUT POWER SUPPLY
TBD	Color Kinetics C-200 PSU	120	115V OR 230V	6	690		UGR	5-Pin DMX	-	-	12 TOTAL IN CHAIN
12	Color Kinetics Colorblast 12	24	24V DC	2.1	50	4-Pin XLR	4Pin		Powercore-06	3	
1	Color Kinetics Colorblast PSU	120	115V OR 230V	6	690	IEC	UGR	5-Pin DMX	-	-	
2	Martin Atomic 3000 DMX	208	115/230V	14	3000	NA	L6	5-Pin DMX(3-Pin optional)	4ch	4	PWR INFO IN MANUAL INCORRECT
2	Atomic Colors PSU	120	Hz	6	3	NA	UGR	5-Pin DMX(in) 4-Pin XLR (out)	-	-	
2	Atomic Colors	24	24V DC	6.25	150	4-Pin XLR	4-Pin XLR	4-Pin XLR	Mode1	1	
1	Base Hazer	120	230V AC / 50Hz	6.5	1500	NA	UGR	5-Pin DMX	-	2	
3	Wybron Scroller PSU	120	Hz	6	3	NA	UGR	5-Pin DMX(in) 4-Pin XLR (out)	-	-	
11	Wybron Forerunner 7	24	24V DC	6.25	150	4-Pin XLR	4-Pin XLR	4-Pin XLR	Mode 1	1	
4	High End TurboRay	120	100-240 V 50-60 Hz	5	500	PowerCON	L5	5-Pin DMX	Standard	53	Pass through for TrueOne Jumpers; Can daisy chain
1	High End Shapeshifter	120	100 - 240V	7	700	PowerCON	L5 or UGR	5-Pin DMX	Shapeshifter C1 (Mode2 79 ch)	79	
10	Clay Paky Sharpy Wash 330	208	115/230V	1.6	330	PowerCON	L5 or UGR	5-Pin DMX	Sharpy Wash 330 S Lamp On	22	
8	Varilite VL 3500 Q Spot	208	200 - 264 V AC	12	1200	PowerCON	L6	5-Pin DMX	Enhanced 16-bit mode	31	
4	Clay Paky Sharpy	208	115/230V	1	189	PowerCON	L5 or UGR	5-Pin DMX	Sharpy Vector LC	20	
3	GLP Impression FR1	120	100-240 V 50-60 Hz	1	85	PowerCON	L5 or UGR	5-Pin DMX	Normal	16	Pass through for TrueOne Jumpers; Can daisy chain
4	Varilite VLX Wash	120	100-240 V 50-60 Hz	10	1200	PowerCON	L5 or UGR	5-Pin DMX	7 Group Modes	72	
4	Varilite VL 2500 Spot	208	100-240 V 50-60 Hz	3.5	700	PowerCON	L5	5-Pin DMX	Mode 1	22	
21	ETC Source4 36deg	120	DIMMER			NA	Stage Pin	-	-	1	
11	Altman Q Lite	120	DIMMER			NA	Stage Pin	-	-	1	
12	L&E Broad Cyc	120	DIMMER			NA	Stage Pin	-	-	1	
12	ETC Source4 Fresnel	120	DIMMER			NA	Stage Pin	-	-	1	
14	PAR 64 NSP	120	DIMMER			NA	Stage Pin	-	-	1	
6	S4 PAR NSP	120	DIMMER			NA	Stage Pin	-	-	1	

Wells Dimmable Power Hookup

Mult Circuit	Dimmer	Channel #	Booth Raceway	Dimmer	Channel #
E1	11		AA 1	67	51
E2	12	336	AA 2	68	52
E3	13	335	AA 3	69	53
E4	14	334	AA 4	70	54
E5	15	343	AA 5	71	55
E6	16		AA 6	72	AA Scroller PSU
F1	19	323			
F2	20	322	Stinger	73	43
F3	21	321	Stinger	74	44
F4	22	41	Deck Circuit	Channel #	
F5	23	344	67		
F6	24	42	74		
C1	31	342	75		
C2	32	341	76	246	
C3	33		77	236	
C4	34		78	245	
C5	35		79	235	
C6	36		80	244	
B1	43	316	81	234	
B2	44	315	82	200	
B3	45	314	83		
B4	46	306	84	197	
B5	47	305	85	193	
B6	48	304	86	194	
G1	49	326	87	191	
G2	50	325	88	241	
G3	51	324	89	231	
G4	52		90	242	
G5	53		91	232	
G6	54		92	243	
D1	55	45	93	233	
D2	56	333	94		
D3	57	332	WN	Dimmer	Channel #
D4	58	331	WN1	9	198
D5	59	47	WN2	10	195
D6	60	48	WN3	17	192
A1	61	313	WN4	18	201
A2	62	312	WN5	27	199
A3	63	311	WN6	28	196
A4	64	313 (error?)			
A5	65	302			
A6	66	301			

Wells Non-Dim Power Hookup

Mult Circuit	Channel #	Type	Mult Circuit	Channel #	Type
CC 1	23	Sharpy	SL 1	104	VL 2500
CC 2	6	VL 3500	SL 2	103	VL 2500
CC 3	7	VL 3500	SL 3	94	VLX
CC 4	8	VL 3500	SL 4	93	VLX
CC 5	24	Sharpy	SL 5	171 -- 179	C200
CC 6			SL 6	Scroller PSU	Scroller PSU
DD 1	39	D40	SR 1	102	VL 2500
DD 2	20	Sharpy Wash	SR 2	101	VL 2500
DD 3			SR 3	92	VLX
DD 4			SR 4	91	VLX
DD 5			SR 5	121 -- 128	C200
DD 6	45	DIMMER	SR 6	Scroller PSU	Scroller PSU
EE 1	4	VL 3500	Z1		LED SL
EE 2	38, 40	D40	Z2		LED SR
EE 3	18	Sharpy Wash	Z3	112	STROBE SL
EE 4	19	Sharpy Wash	Z4	111	STROBE SR
EE 5	5	VL 3500	Z5	71 -- 74	TURBORAY
EE 6			Z6	300, 81 -- 83	SSHIFT + FR1
FF 1	35,36,37	D40	ZZ 1		CB PSU
FF 2	15	Sharpy Wash	ZZ 2	130 -- 169	C200S BK WALL
FF 3	16	Sharpy Wash	ZZ 3		ATOMIC SCRL PSU
FF 4	17	Sharpy Wash	ZZ 4		
FF 5			ZZ 5		
FF 6			ZZ 6		
GG 1	21,22	Sharpy			
GG 2	11,12,13,14	Sharpy Wash			
GG 3	1	VL 3500			
GG 4	31,32,33,34	D40			
GG 5	2	VL 3500			
GG 6	3	VL 3500			

Carnegie Mellon University School of Drama

John Wells Video Studio

Multi-cable Runs


<u>Multi</u>	<u>Circuits</u>	<u>From</u>	<u>To</u>	<u>Length</u>
A	61-66	Pipe Grid	Truss A	25'
B	43-48	Pipe Grid	Truss B	25'
C	31-36	Pipe Grid	Truss C	25'
D	55-60	Pipe Grid	Truss D	25'
E	11-16	Pipe Grid	Truss E	25'
F	19-24	Pipe Grid	Truss F	25'
G	49-54	Pipe Grid	Truss G	25'

Carnegie Mellon University School of Drama

John Wells Video Studio

Circuits

<u>Location</u>	<u>20 Amp</u>	<u>Total</u>		<u>50 Amp</u>	<u>Total</u>
Pipe Grid	1-66	66		95-99	5
Booth Raceway	67-74	8			
Deck	67, 74-94	22		100-102	3
		94			8

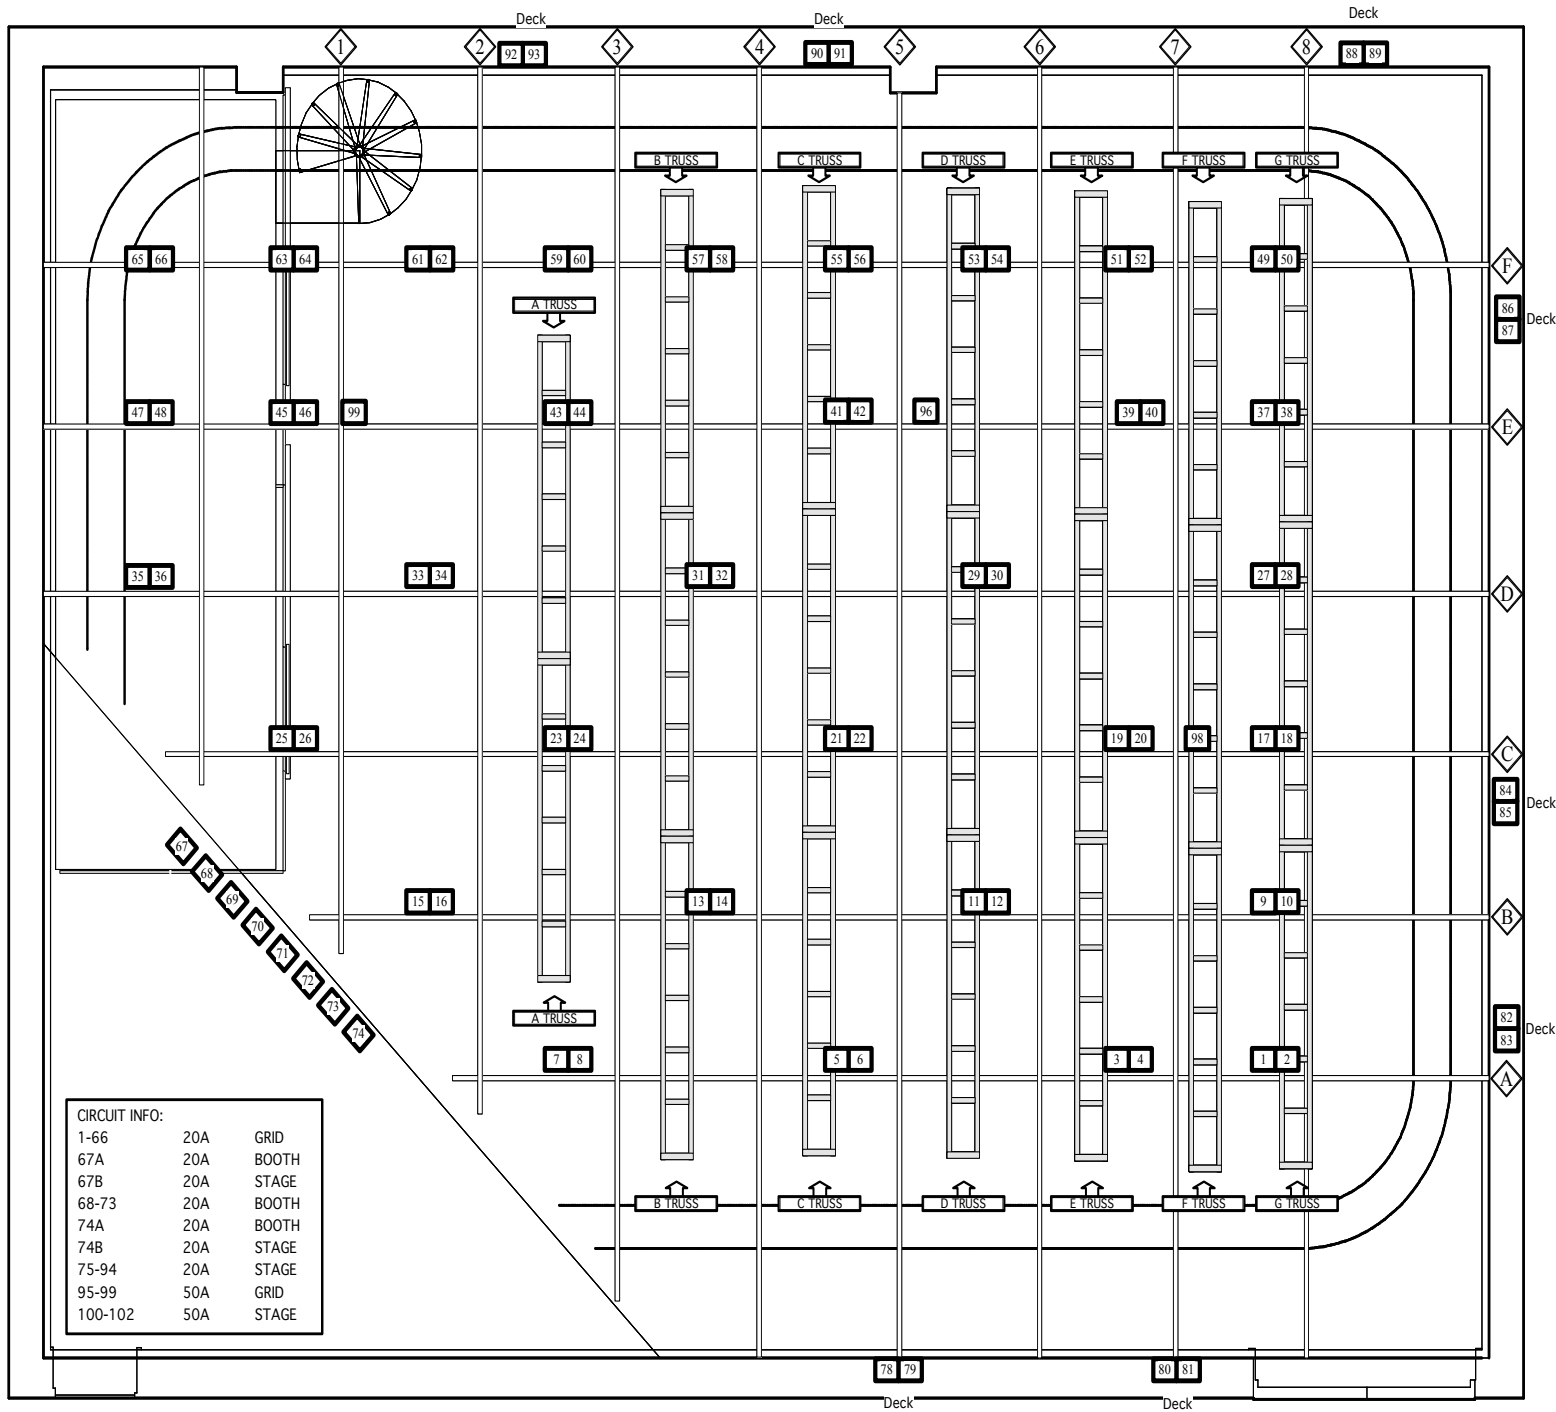

VW to LW User Fileds

User	Info
User 1	Distro
User 2	Breaker
User 3	Voltage
User 4	Plug
User 5	Mode
User 6	
User 7	
User 8	
User 9	
User 10	
User 11	

Universe	Item	Address
1	Dimmers	1 thru 98
1	Hazer	101 thru 102
1	Truss A Scrollers	151 thru 155
2	Back wall	1 thru 493
3	SR	1 thru 221
3	SL	251 thru 472
4	3500s	1 thru 218
4	sWash	249 thru 359
4	Sharpys	381 thru 441
4	D40	461 thru 512
5	sWash	1 thru 67
5	D40	89 thru 124
7 + 8	MBOX	1+

Universes Items

- 1 Dimmers + hazer + truss scrollers (A)
- 2 Back Wall
- 3 SL/SR
- 4 G, E, C Truss
- 5 D, F Truss
- 6
- 7 MBOX
- 8 MBOX

NODE SPLITTER

Port	Universe	Output
1	1	Truss A
2		
3	4	Truss C
4	5	Truss D
5	4	Truss E
6	5	Truss F
7	4	Truss G
8		
9		
10		
11		
12	1	Hazer
13		
14	2	BOOTH Opto (back wall)
15	3	Port
16	1	Wells Dimmers

SWITCH

PORT	Protocol	Notes
1	MA Net	
2	MA Net	
3	MA Net	
4	CMU Net	In (cable in cage)
5	CMU Net	Out (to computer in cage)
6	VIA	
7	sACN	
8	sACN	
9	sACN	
10	sACN	

Address	Chan	Position	U#	Instrument Type & Accessory & Load	Purpose	Clr & Gbo
1/1	(301)	Truss A	11	ETC Source4 36deg 575w	SM FRONT WARM	R08+ R119
1/9	(198)	Truss H	9	Altman Q Lite 1kW	BLINDER	
1/10	(195)	Truss H	6	Altman Q Lite 1kW	BLINDER	
1/12	(336)	Truss E	2	ETC Source4 Fresnel 750w	FRESNELS	R80
1/13	(335)	Truss E	5	ETC Source4 Fresnel 750w	FRESNELS	R80
1/14	(334)	Truss E	8	ETC Source4 Fresnel 750w	FRESNELS	R80
1/15	(343)	Truss E	10	ETC Source4 36deg 575w	SM SPECIALS	N/C
1/17	(192)	Truss H	3	Altman Q Lite 1kW	BLINDER	
1/18	(201)	USL Wall Mount	5	Altman Q Lite 1kW	BLINDER	
1/19	(323)	Truss F	3	ETC Source4 Fresnel 750w	FRESNELS	R21
1/20	(322)	Truss F	7	ETC Source4 Fresnel 750w	FRESNELS	R21
1/21	(321)	Truss F	13	ETC Source4 Fresnel 750w	FRESNELS	R21
1/22	(41)	Truss F	1	PAR 64 NSP 1kW	PARS	
1/23	(344)	Truss F	2	ETC Source4 36deg 575w	SM SPECIALS	N/C
1/24	(42)	Truss F	5	PAR 64 NSP 1kW	PARS	
1/27	(199)	USL Wall Mount	5	Altman Q Lite 1kW	BLINDER	
1/28	(196)	USC Wall Mount	5	Altman Q Lite 1kW	BLINDER	
1/35	(341)	Truss C	6	ETC Source4 36deg 575w	SM SPECIALS	N/C
1/43	(316)	Truss B	1	ETC Source4 36deg 575w	SM FRONT COOL	R60+ R119
1/44	(315)	Truss B	2	ETC Source4 36deg 575w	SM FRONT COOL	R60+ R119

Address	Chan	Position	U#	Instrument Type & Accessory & Load	Purpose	Clr & Gbo
1/45	(314)	Truss B	3	ETC Source4 36deg 575w	SM FRONT COOL	R60+ R119
1/46	(306)	Truss B	4	ETC Source4 36deg 575w	SM FRONT WARM	R08+ R119
1/47	(305)	Truss B	5	ETC Source4 36deg 575w	SM FRONT WARM	R08+ R119
1/48	(304)	Truss B	6	ETC Source4 36deg 575w	SM FRONT WARM	R08+ R119
1/49	(326)	Truss G	4	ETC Source4 Fresnel 750w	FRESNELS	R21
1/50	(325)	Truss G	8	ETC Source4 Fresnel 750w	FRESNELS	R21
1/51	(324)	Truss G	13	ETC Source4 Fresnel 750w	FRESNELS	R21
1/55	(342)	Truss C	2	ETC Source4 36deg 575w	SM SPECIALS	N/C
1/56	(333)	Truss D	2	ETC Source4 Fresnel 750w	FRESNELS	R80
1/57	(332)	Truss D	4	ETC Source4 Fresnel 750w	FRESNELS	R80
1/58	(331)	Truss D	8	ETC Source4 Fresnel 750w	FRESNELS	R80
1/59	(46)	Truss D	3	PAR 64 NSP	PARS	
1/60	(47)	Truss D	7	PAR 64 NSP 1kW	PARS	
1/61	(313)	Truss A	1	ETC Source4 36deg 575w	SM FRONT COOL	R60+ R119
1/62	(312)	Truss A	2	ETC Source4 36deg 575w	SM FRONT COOL	R60+ R119
1/63	(311)	Truss A	5	ETC Source4 36deg 575w	SM FRONT COOL	R60+ R119
1/64	(313)	Truss A	7	ETC Source4 36deg 575w	SM FRONT WARM	R08+ R119
1/65	(302)	Truss A	10	ETC Source4 36deg 575w	SM FRONT WARM	R08+ R119

Address	Chan	Position	U#	Instrument Type & Accessory & Load	Purpose	Clr & Gbo
1/67	(51)	Truss A	3	ETC Source4 36deg 575w	SCROLLER FRONTS	R119
1/68	(52)	Truss A	4	ETC Source4 36deg 575w	SCROLLER FRONTS	R119
1/69	(53)	Truss A	6	ETC Source4 36deg 575w	SCROLLER FRONTS	R119
1/70	(54)	Truss A	8	ETC Source4 36deg 575w	SCROLLER FRONTS	R119
1/71	(55)	Truss A	9	ETC Source4 36deg 575w	SCROLLER FRONTS	R119
1/72	(48)	Truss D	9	PAR 64 NSP 1kW	PARS	
1/73	(43)	Truss F	11	PAR 64 NSP 1kW		
1/74	(44)	Truss F	14	PAR 64 NSP 1kW	PARS	
1/76	(246)	SLX-Pipe	1	PAR 64 NSP	SIDE PARS	
1/77	(236)	SLX-Pipe	1	S4 PAR NSP	SIDE SCROLLERS	
1/78	(245)	SLX-Pipe	2	PAR 64 NSP	SIDE PARS	
1/79	(235)	SLX-Pipe	2	S4 PAR NSP	SIDE SCROLLERS	
1/80	(244)	SLX-Pipe	3	PAR 64 NSP	SIDE PARS	
1/81	(234)	SLX-Pipe	3	S4 PAR NSP	SIDE SCROLLERS	
1/82	(200)	USL Wall Mount	11	Altman Q Lite 1kW	AUDIENCE BLINDER	
1/84	(197)	USC Wall Mount	11	Altman Q Lite 1kW	AUDIENCE BLINDER	
1/85	(193)	USR Wall Mount	5	Altman Q Lite 1kW	BLINDER	
1/86	(194)	USR Wall Mount	7	Altman Q Lite 1kW	BLINDER	
1/87	(191)	USR Wall Mount	4	Altman Q Lite 1kW	BLINDER	
1/88	(241)	SRX-Pipe-2	1	PAR 64 NSP	SIDE PARS	
1/89	(231)	SRX-Pipe-2	1	S4 PAR NSP	SIDE SCROLLERS	
1/90	(242)	SRX-Pipe-2	2	PAR 64 NSP	SIDE PARS	

Address	Chan	Position	U#	Instrument Type & Accessory & Load	Purpose	Clr & Gbo
1/91	(232)	SR X-Pipe-2	2	S4 PAR NSP	SIDE SCROLLERS	
1/92	(243)	SR X-Pipe-2	3	PAR 64 NSP	SIDE PARS	
1/93	(233)	SR X-Pipe-2	3	S4 PAR NSP	SIDE SCROLLERS	
1/101	(420)	Booth	1	Hazebase Base Hazer Pro 1.5kW	Base Hazer	
1/151	(51)	Truss A	3	Wybron Forerunner 7	SCROLLER	R119
1/152	(52)	Truss A	4	Wybron Forerunner 7	SCROLLER	R119
1/153	(53)	Truss A	6	Wybron Forerunner 7	SCROLLER	R119
1/154	(54)	Truss A	8	Wybron Forerunner 7	SCROLLER	R119
1/155	(55)	Truss A	9	Wybron Forerunner 7	SCROLLER	R119
2/1	(71)	US DECK	1	High End TurboRay 500w	BACK EYE CANDY	
2/54	(72)	US DECK	2	High End TurboRay 500w	BACK EYE CANDY	
2/107	(73)	US DECK	4	High End TurboRay 500w	BACK EYE CANDY	
2/160	(74)	US DECK	5	High End TurboRay 500w	BACK EYE CANDY	
2/213	(81)	USR Wall Mount	6	GLP Impression FR1 80w	EYE CANDY	
2/229	(82)	USC Wall Mount	6	GLP Impression FR1 80w	EYE CANDY	
2/245	(83)	USL Wall Mount	6	GLP Impression FR1 80w	EYE CANDY	
2/261	(111)	USR Wall Mount	9	Atomic Colors	STROBE	
2/262	(111)	USR Wall Mount	9	Martin Atomic 3000 DMX 3kW	STROBE	
2/266	(112)	USL Wall Mount	10	Atomic Colors	STROBE	
2/267	(112)	USL Wall Mount	10	Martin Atomic 3000 DMX 3kW	STROBE	
2/271	(130)	USR Wall Mount	2	Color Kinetics C-200 24w	EYE CANDY	
2/274	(131)	USR Wall Mount	3	Color Kinetics C-200 24w	EYE CANDY	



DMX Address Hookup

Address	Chan	Position	U#	Instrument Type & Accessory & Load	Purpose	Clr & Gbo
2/277	(132)	USR Wall Mount	4	Color Kinetics C-200 24w	EYE CANDY	
2/280	(133)	USR Wall Mount	5	Color Kinetics C-200 24w	EYE CANDY	
2/283	(134)	USR Wall Mount	5	Color Kinetics C-200 24w	EYE CANDY	
2/286	(135)	USR Wall Mount	6	Color Kinetics C-200 24w	EYE CANDY	
2/289	(136)	USR Wall Mount	7	Color Kinetics C-200 24w	EYE CANDY	
2/292	(137)	USR Wall Mount	8	Color Kinetics C-200 24w	EYE CANDY	
2/295	(138)	USR Wall Mount	1	Color Kinetics C-200 24w	EYE CANDY	
2/298	(139)	USR Wall Mount	2	Color Kinetics C-200 24w	EYE CANDY	
2/301	(140)	USR Wall Mount	3	Color Kinetics C-200 24w	EYE CANDY	
2/304	(141)	USR Wall Mount	4	Color Kinetics C-200 24w	EYE CANDY	
2/307	(142)	USR Wall Mount	7	Color Kinetics C-200 24w	EYE CANDY	
2/310	(143)	USR Wall Mount	8	Color Kinetics C-200 24w	EYE CANDY	
2/313	(144)	USR Wall Mount	9	Color Kinetics C-200 24w	EYE CANDY	
2/316	(145)	USR Wall Mount	12	Color Kinetics C-200 24w	EYE CANDY	
2/319	(146)	USC Wall Mount	1	Color Kinetics C-200 24w	EYE CANDY	
2/322	(147)	USC Wall Mount	2	Color Kinetics C-200 24w	EYE CANDY	
2/325	(148)	USC Wall Mount	2	Color Kinetics C-200 24w	EYE CANDY	
2/328	(149)	USC Wall Mount	3	Color Kinetics C-200 24w	EYE CANDY	
2/331	(150)	USC Wall Mount	7	Color Kinetics C-200 24w	EYE CANDY	
2/334	(151)	USC Wall Mount	8	Color Kinetics C-200 24w	EYE CANDY	
2/337	(152)	USC Wall Mount	9	Color Kinetics C-200 24w	EYE CANDY	
2/340	(153)	USC Wall Mount	10	Color Kinetics C-200 24w	EYE CANDY	



DMX Address Hookup

Address	Chan	Position	U#	Instrument Type & Accessory & Load	Purpose	Clr & Gbo
2/343	(154)	USL Wall Mount	1	Color Kinetics C-200 24w	EYE CANDY	
2/346	(155)	USL Wall Mount	2	Color Kinetics C-200 24w	EYE CANDY	
2/349	(156)	USL Wall Mount	3	Color Kinetics C-200 24w	EYE CANDY	
2/352	(157)	USL Wall Mount	4	Color Kinetics C-200 24w	EYE CANDY	
2/355	(158)	USL Wall Mount	7	Color Kinetics C-200 24w	EYE CANDY	
2/358	(159)	USL Wall Mount	8	Color Kinetics C-200 24w	EYE CANDY	
2/361	(160)	USL Wall Mount	9	Color Kinetics C-200 24w	EYE CANDY	
2/364	(161)	USL Wall Mount	10	Color Kinetics C-200 24w	EYE CANDY	
2/367	(162)	USL Wall Mount	1	Color Kinetics C-200 24w	EYE CANDY	
2/370	(163)	USL Wall Mount	2	Color Kinetics C-200 24w	EYE CANDY	
2/373	(164)	USL Wall Mount	3	Color Kinetics C-200 24w	EYE CANDY	
2/376	(165)	USL Wall Mount	4	Color Kinetics C-200 24w	EYE CANDY	
2/379	(166)	USL Wall Mount	6	Color Kinetics C-200 24w	EYE CANDY	
2/382	(167)	USL Wall Mount	7	Color Kinetics C-200 24w	EYE CANDY	
2/385	(168)	USL Wall Mount	8	Color Kinetics C-200 24w	EYE CANDY	
2/388	(169)	USL Wall Mount	9	Color Kinetics C-200 24w	EYE CANDY	
2/391	(211)	Truss H	1	Color Kinetics Colorblast 12 50w	TRUSS WARMER	
2/394	(212)	Truss H	2	Color Kinetics Colorblast 12 50w	TRUSS WARMER	
2/397	(213)	Truss H	4	Color Kinetics Colorblast 12 50w	TRUSS WARMER	
2/400	(214)	Truss H	5	Color Kinetics Colorblast 12 50w	TRUSS WARMER	
2/403	(215)	Truss H	7	Color Kinetics Colorblast 12 50w	TRUSS WARMER	
2/406	(216)	Truss H	8	Color Kinetics Colorblast 12 50w	TRUSS WARMER	

Address	Chan	Position	U#	Instrument Type & Accessory & Load	Purpose	Clr & Gbo
2/409	(217)	Truss H	10	Color Kinetics Colorblast 12 50w	TRUSS WARMER	
2/412	(218)	Truss H	11	Color Kinetics Colorblast 12 50w	TRUSS WARMER	
2/415	(300)	US DECK	3	High End Shapeshifter	BACK EYE CANDY	
3/1	(91)	SR Deck	2	Varilite VLX Wash 840w	SIDE MOVERS	
3/73	(92)	SR Deck	3	Varilite VLX Wash 840w	SIDE MOVERS	
3/145	(101)	SR 6' Truss	1	Varilite VL 2500 Spot 700w	SIDE MOVERS	
3/167	(102)	SR 10' Truss	1	Varilite VL 2500 Spot 700w	SIDE MOVERS	
3/189	(121)	SR 10' Truss	2	Color Kinetics C-200 24w	EYE CANDY	
3/192	(122)	SR 10' Truss	3	Color Kinetics C-200 24w	EYE CANDY	
3/195	(123)	SR 10' Truss	4	Color Kinetics C-200 24w	EYE CANDY	
3/198	(124)	SR 10' Truss	5	Color Kinetics C-200 24w	EYE CANDY	
3/201	(125)	SR 10' Truss	6	Color Kinetics C-200 24w	EYE CANDY	
3/204	(126)	SR 10' Truss	7	Color Kinetics C-200 24w	EYE CANDY	
3/207	(127)	SR 10' Truss	8	Color Kinetics C-200 24w	EYE CANDY	
3/210	(128)	SR 10' Truss	9	Color Kinetics C-200 24w	EYE CANDY	
3/213	(221)	SR Deck	1	Color Kinetics Colorblast 12 50w	TRUSS WARMER	
3/216	(222)	SR Deck	4	Color Kinetics Colorblast 12 50w	TRUSS WARMER	
3/219	(231)	SR X-Pipe-2	1	Wybron Forerunner 7		
3/220	(232)	SR X-Pipe-2	2	Wybron Forerunner 7		
3/221	(233)	SR X-Pipe-2	3	Wybron Forerunner 7		
3/251	(93)	SL Deck	2	Varilite VLX Wash 840w	SIDE MOVERS	
3/323	(94)	SL Deck	3	Varilite VLX Wash 840w	SIDE MOVERS	

Address	Chan	Position	U#	Instrument Type & Accessory & Load	Purpose	Clr & Gbo
3/395	(103)	SL 6' Truss	1	Varilite VL 2500 Spot 700w	SIDE MOVERS	
3/417	(104)	SL 10' Truss	1	Varilite VL 2500 Spot 700w	SIDE MOVERS	
3/439	(172)	SL 10' Truss	2	Color Kinetics C-200 24w	EYE CANDY	
3/442	(173)	SL 10' Truss	3	Color Kinetics C-200 24w	EYE CANDY	
3/445	(174)	SL 10' Truss	4	Color Kinetics C-200 24w	EYE CANDY	
3/448	(175)	SL 10' Truss	5	Color Kinetics C-200 24w	EYE CANDY	
3/451	(176)	SL 10' Truss	6	Color Kinetics C-200 24w	EYE CANDY	
3/454	(177)	SL 10' Truss	7	Color Kinetics C-200 24w	EYE CANDY	
3/457	(178)	SL 10' Truss	8	Color Kinetics C-200 24w	EYE CANDY	
3/460	(179)	SL 10' Truss	9	Color Kinetics C-200 24w	EYE CANDY	
3/463	(223)	SL Deck	1	Color Kinetics Colorblast 12 50w	TRUSS WARMER	
3/466	(224)	SL Deck	4	Color Kinetics Colorblast 12 50w	TRUSS WARMER	
3/469	(234)	SL X-Pipe	3	Wybron Forerunner 7		
3/470	(235)	SL X-Pipe	2	Wybron Forerunner 7		
3/471	(236)	SL X-Pipe	1	Wybron Forerunner 7		
4/1	(1)	Truss G	3	Varilite VL 3500 Q Spot 1.2kW	3500s	
4/32	(2)	Truss G	9	Varilite VL 3500 Q Spot 1.2kW	3500s	
4/63	(3)	Truss G	14	Varilite VL 3500 Q Spot 1.2kW	3500s	
4/94	(4)	Truss E	1	Varilite VL 3500 Q Spot 1.2kW	3500s	
4/125	(5)	Truss E	9	Varilite VL 3500 Q Spot 1.2kW	3500s	
4/156	(6)	Truss C	3	Varilite VL 3500 Q Spot 1.2kW	3500s	
4/187	(7)	Truss C	4	Varilite VL 3500 Q Spot 1.2kW	3500s	

Address	Chan	Position	U#	Instrument Type & Accessory & Load	Purpose	Clr & Gbo
4/218	(8)	Truss C	5	Varilite VL 3500 Q Spot 1.2kW	3500s	
4/249	(11)	Truss G	2	Clay Paky Sharpy Wash 330 400w	SHAPY WASHS	
4/271	(12)	Truss G	6	Clay Paky Sharpy Wash 330 400w	SHAPY WASHS	
4/293	(13)	Truss G	11	Clay Paky Sharpy Wash 330 400w	SHAPY WASHS	
4/315	(14)	Truss G	15	Clay Paky Sharpy Wash 330 400w	SHAPY WASHS	
4/337	(18)	Truss E	4	Clay Paky Sharpy Wash 330 400w	SHARPY WASH	
4/359	(19)	Truss E	6	Clay Paky Sharpy Wash 330 400w	SHARPY WASH	
4/381	(21)	Truss G	1	Clay Paky Sharpy 189w	SHAPY SPOTS	
4/401	(22)	Truss G	16	Clay Paky Sharpy 189w	SHAPY SPOTS	
4/421	(23)	Truss C	1	Clay Paky Sharpy 189w	SHARPY	
4/441	(24)	Truss C	7	Clay Paky Sharpy 189w	SHARPY	
4/461	(31)	Truss G	5	ETC D40 Lustr SELL40 110w	D40s	
4/467	(32)	Truss G	7	ETC D40 Lustr SELL40 110w	D40s	
4/473	(33)	Truss G	10	ETC D40 Lustr SELL40 110w	D40s	
4/479	(34)	Truss G	12	ETC D40 Lustr SELL40 110w	D40s	
4/485	(38)	Truss E	3	ETC D40 Lustr SELL40 110w	D40s	
4/491	(40)	Truss E	7	ETC D40 Lustr SELL40 110w	D40s	
5/1	(15)	Truss F	6	Clay Paky Sharpy Wash 330 400w	SHARPY WASH	
5/23	(16)	Truss F	8	Clay Paky Sharpy Wash 330 400w	SHARPY WASH	
5/45	(17)	Truss F	10	Clay Paky Sharpy Wash 330 400w	SHARPY WASH	
5/67	(20)	Truss D	6	Clay Paky Sharpy Wash 330 400w	SHARPY WASH	
5/89	(35)	Truss F	4	ETC D40 Lustr SELL40 110w	D40s	



DMX Address Hookup

Address	Chan	Position	U#	Instrument Type & Accessory & Load	Purpose	Clr & Gbo
5/95	(36)	Truss F	9	ETC D40 Lustr SELL40 110w	D40s	
5/101	(37)	Truss F	12	ETC D40 Lustr SELL40 110w	D40s	
5/107	(39)	Truss D	5	ETC D40 Lustr SELL40 110w	D40	



Instrument Schedule

4/30/22 4:09 PM

TABLE OF CONTENTS

Booth	1	Truss B	9
SL 6' Truss	1	Truss C	10
SL 10' Truss	2	Truss D	11
SL Deck	3	Truss E	12
SL X-Pipe	4	Truss F	13
SR 6' Truss	4	Truss G	14
SR 10' Truss	5	Truss H	16
SR Deck	6	US DECK	17
SR X-Pipe-2	7	USC Wall Mount	18
Truss A	8	USL Wall Mount	19
		USR Wall Mount	21



Instrument Schedule

Booth

U#	Chan	Addr	Ckt	Distro	Dist Brkr	Plug	Voltage	Instrument Type	Purpose	Color & Gobo
1	(420)	1/101					120	Hazebase Base Hazer Pro	Base Hazer	

SL 6' Truss

U#	Chan	Addr	Ckt	Distro	Dist Brkr	Plug	Voltage	Instrument Type	Purpose	Color & Gobo
1	(103)	3/395	SL2	Xotchil	2	L6	208	Varilite VL 2500 Spot	SIDE MOVERS	



Instrument Schedule

SL 10' Truss

U#	Chan	Addr	Ckt	Distro	Dist Brkr	Plug	Voltage	Instrument Type	Purpose	Color & Gobo
1	(104)	3/417	SL1	Xotchil	1	L6	208	Varilite VL 2500 Spot	SIDE MOVERS	
2	(172)	3/439	SL5	Xotchil	5	BNC	24	Color Kinetics C-200	EYE CANDY	
3	(173)	3/442	SL5	Xotchil	5	BNC	24	Color Kinetics C-200	EYE CANDY	
4	(174)	3/445	SL5	Xotchil	5	BNC	24	Color Kinetics C-200	EYE CANDY	
5	(175)	3/448	SL5	Xotchil	5	BNC	24	Color Kinetics C-200	EYE CANDY	
6	(176)	3/451	SL5	Xotchil	5	BNC	24	Color Kinetics C-200	EYE CANDY	
7	(177)	3/454	SL5	Xotchil	5	BNC	24	Color Kinetics C-200	EYE CANDY	
8	(178)	3/457	SL5	Xotchil	5	BNC	24	Color Kinetics C-200	EYE CANDY	
9	(179)	3/460	SL5	Xotchil	5	BNC	24	Color Kinetics C-200	EYE CANDY	



Instrument Schedule

SL Deck

U#	Chan	Addr	Ckt	Distro	Dist Brkr	Plug	Voltage	Instrument Type	Purpose	Color & Gobo
1	(223)	3/463	ZZ1	Bridget	1	4-PIN XLR	24	Color Kinetics Colorblast 12	TRUSS WARMER	
2	(93)	3/251	SL4	Xotchil	4	L5	120	Varilite VLX Wash	SIDE MOVERS	
3	(94)	3/323	SL3	Xotchil	3	L5	120	Varilite VLX Wash	SIDE MOVERS	
4	(224)	3/466	ZZ1	Bridget	1	4-PIN XLR	24	Color Kinetics Colorblast 12	TRUSS WARMER	



Instrument Schedule

SL X-Pipe

U#	Chan	Addr	Ckt	Distro	Dist Brkr	Plug	Voltage	Instrument Type	Purpose	Color & Gobo
			SL6	Xotchil	6	UGR	120	Scroller PSU Wybron	Scroller PSU Wybron	
1	(246)	1/76	76			SP	120	PAR 64 NSP	SIDE PARS	
1	(236)	1/77	77	Xotchil	6	SP	120	S4 PAR NSP	SIDE SCROLLERS	
1	(236)	3/471	SL6	Xotchil	6	SP	120	Wybron Forerunner 7		
2	(245)	1/78	78			SP	120	PAR 64 NSP	SIDE PARS	
2	(235)	1/79	79	Xotchil	6	SP	120	S4 PAR NSP	SIDE SCROLLERS	
2	(235)	3/470	SL6	Xotchil	6	SP	120	Wybron Forerunner 7		
3	(244)	1/80	80			SP	120	PAR 64 NSP	SIDE PARS	
3	(234)	1/81	81	Xotchil	6	SP	120	S4 PAR NSP	SIDE SCROLLERS	
3	(234)	3/469	SL6	Xotchil	6	SP	120	Wybron Forerunner 7		

SR 6' Truss

U#	Chan	Addr	Ckt	Distro	Dist Brkr	Plug	Voltage	Instrument Type	Purpose	Color & Gobo
1	(101)	3/145	SR2	Xotchil	8	L6	208	Varilite VL 2500 Spot	SIDE MOVERS	



Instrument Schedule

SR 10' Truss

U#	Chan	Addr	Ckt	Distro	Dist Brkr	Plug	Voltage	Instrument Type	Purpose	Color & Gobo
1	(102)	3/167	SR1	Xotchil	7	L6	208	Varilite VL 2500 Spot	SIDE MOVERS	
2	(121)	3/189	SR5	Xotchil	11	BNC	24	Color Kinetics C-200	EYE CANDY	
3	(122)	3/192	SR5	Xotchil	11	BNC	24	Color Kinetics C-200	EYE CANDY	
4	(123)	3/195	SR5	Xotchil	11	BNC	24	Color Kinetics C-200	EYE CANDY	
5	(124)	3/198	SR5	Xotchil	11	BNC	24	Color Kinetics C-200	EYE CANDY	
6	(125)	3/201	SR5	Xotchil	11	BNC	24	Color Kinetics C-200	EYE CANDY	
7	(126)	3/204	SR5	Xotchil	11	BNC	24	Color Kinetics C-200	EYE CANDY	
8	(127)	3/207	SR5	Xotchil	11	BNC	24	Color Kinetics C-200	EYE CANDY	
9	(128)	3/210	SR5	Xotchil	11	BNC	24	Color Kinetics C-200	EYE CANDY	



Instrument Schedule

SR Deck

U#	Chan	Addr	Ckt	Distro	Dist Brkr	Plug	Voltage	Instrument Type	Purpose	Color & Gobo
1	(221)	3/213	ZZ1	Bridget	1	4-PIN XLR	24	Color Kinetics Colorblast 12	TRUSS WARMER	
2	(91)	3/1	SR4	Xotchil	10	L5	120	Varilite VLX Wash	SIDE MOVERS	
3	(92)	3/73	SR3	Xotchil	9	L5	120	Varilite VLX Wash	SIDE MOVERS	
4	(222)	3/216	ZZ1	Bridget	1	4-PIN XLR	24	Color Kinetics Colorblast 12	TRUSS WARMER	



Instrument Schedule

SR X-Pipe-2

U#	Chan	Addr	Ckt	Distro	Dist Brkr	Plug	Voltage	Instrument Type	Purpose	Color & Gobo
			SR6	Xotchil	12	UGR	120	Scroller PSU Wybron	Scroller PSU Wybron	
1	(241)	1/88	88			SP	120	PAR 64 NSP	SIDE PARS	
1	(231)	1/89	89	Xotchil	12	SP	120	S4 PAR NSP	SIDE SCROLLERS	
1	(231)	3/219	SR6	Xotchil	12	SP	120	Wybron Forerunner 7		
2	(242)	1/90	90			SP	120	PAR 64 NSP	SIDE PARS	
2	(232)	1/91	91	Xotchil	12	SP	120	S4 PAR NSP	SIDE SCROLLERS	
2	(232)	3/220	SR6	Xotchil	12	SP	120	Wybron Forerunner 7		
3	(243)	1/92	92			SP	120	PAR 64 NSP	SIDE PARS	
3	(233)	1/93	93	Xotchil	12	SP	120	S4 PAR NSP	SIDE SCROLLERS	
3	(233)	3/221	SR6	Xotchil	12	SP	120	Wybron Forerunner 7		



Instrument Schedule

Truss A

U#	Chan	Addr	Ckt	Distro	Dist Brkr	Plug	Voltage	Instrument Type	Purpose	Color & Gobo
			Stg	Bridget	4	UGR	120	Scroller PSU Wybron	Scroller PSU Wybron	
1	(313)	1/61	A1			SP	120	ETC Source4 36deg	SM FRONT COOL	R60+R119
2	(312)	1/62	A2			SP	120	ETC Source4 36deg	SM FRONT COOL	R60+R119
3	(51)	1/67	AA1	Bridget	4	SP	120	ETC Source4 36deg	SCROLLER FRONTS	R119
3	(51)	1/151	AA6	Bridget	4	SP	120	Wybron Forerunner 7	SCROLLER	R119
4	(52)	1/68	AA2	Bridget	4	SP	120	ETC Source4 36deg	SCROLLER FRONTS	R119
4	(52)	1/152	AA6	Bridget	4	SP	120	Wybron Forerunner 7	SCROLLER	R119
5	(311)	1/63	A3			SP	120	ETC Source4 36deg	SM FRONT COOL	R60+R119
6	(53)	1/69	AA3	Bridget	4	SP	120	ETC Source4 36deg	SCROLLER FRONTS	R119
6	(53)	1/153	AA6	Bridget	4	SP	120	Wybron Forerunner 7	SCROLLER	R119
7	(313)	1/64	A4			SP	120	ETC Source4 36deg	SM FRONT WARM	R08+R119
8	(54)	1/70	AA4	Bridget	4	SP	120	ETC Source4 36deg	SCROLLER FRONTS	R119
8	(54)	1/154	AA6	Bridget	4	SP	120	Wybron Forerunner 7	SCROLLER	R119
9	(55)	1/71	AA5	Bridget	4	SP	120	ETC Source4 36deg	SCROLLER FRONTS	R119
9	(55)	1/155	AA6	Bridget	4	SP	120	Wybron Forerunner 7	SCROLLER	R119



Instrument Schedule

Truss A

U#	Chan	Addr	Ckt	Distro	Dist Brkr	Plug	Voltage	Instrument Type	Purpose	Color & Gobo
10	(302)	1/65	A5			SP	120	ETC Source4 36deg	SM FRONT WARM	R08+R119
11	(301)	1/1	A6			SP	120	ETC Source4 36deg	SM FRONT WARM	R08+R119

Truss B

U#	Chan	Addr	Ckt	Distro	Dist Brkr	Plug	Voltage	Instrument Type	Purpose	Color & Gobo
1	(316)	1/43	B1			SP	120	ETC Source4 36deg	SM FRONT COOL	R60+R119
2	(315)	1/44	B2			SP	120	ETC Source4 36deg	SM FRONT COOL	R60+R119
3	(314)	1/45	B3			SP	120	ETC Source4 36deg	SM FRONT COOL	R60+R119
4	(306)	1/46	B4			SP	120	ETC Source4 36deg	SM FRONT WARM	R08+R119
5	(305)	1/47	B5			SP	120	ETC Source4 36deg	SM FRONT WARM	R08+R119
6	(304)	1/48	B6			SP	120	ETC Source4 36deg	SM FRONT WARM	R08+R119



Instrument Schedule

Truss C

U#	Chan	Addr	Ckt	Distro	Dist Brkr	Plug	Voltage	Instrument Type	Purpose	Color & Gobo
1	(23)	4/421	CC1	James	6	L6	208	Clay Paky Sharpy	SHARPY	
2	(342)	1/55	C1			SP	120	ETC Source4 36deg	SM SPECIALS	N/C
3	(6)	4/156	CC2	Dean	1	L6	208	Varilite VL 3500 Q Spot	3500s	
4	(7)	4/187	CC3	Dean	2	L6	208	Varilite VL 3500 Q Spot	3500s	
5	(8)	4/218	CC4	Dean	3	L6	208	Varilite VL 3500 Q Spot	3500s	
6	(341)	1/35	C5			SP	120	ETC Source4 36deg	SM SPECIALS	N/C
7	(24)	4/441	CC5	James	6	L6	208	Clay Paky Sharpy	SHARPY	



Instrument Schedule

Truss D

U#	Chan	Addr	Ckt	Distro	Dist Brkr	Plug	Voltage	Instrument Type	Purpose	Color & Gobo
1	(45)		DD6			SP	120	PAR 64 NSP	PARS	
2	(333)	1/56	D2			SP	120	ETC Source4 Fresnel	FRESNELS	R80
3	(46)	1/59	D1			SP	120	PAR 64 NSP	PARS	
4	(332)	1/57	D3			SP	120	ETC Source4 Fresnel	FRESNELS	R80
5	(39)	5/107	DD1	Bridget	8	L5	120	ETC D40 Lustr SELL40	D40	
6	(20)	5/67	DD2	James	4	L6	208	Clay Paky Sharpy Wash 330	SHARPY WASH	
7	(47)	1/60	D5			SP	120	PAR 64 NSP	PARS	
8	(331)	1/58	D4			SP	120	ETC Source4 Fresnel	FRESNELS	R80
9	(48)	1/72	D6			SP	120	PAR 64 NSP	PARS	



Instrument Schedule

Truss E

U#	Chan	Addr	Ckt	Distro	Dist Brkr	Plug	Voltage	Instrument Type	Purpose	Color & Gobo
1	(4)	4/94	EE1	JD	4	L6	208	Varilite VL 3500 Q Spot	3500s	
2	(336)	1/12	E2			SP	120	ETC Source4 Fresnel	FRESNELS	R80
3	(38)	4/485	EE2	Bridget	7	L5	120	ETC D40 Lustr SELL40	D40s	
4	(18)	4/337	EE3	James	3	L6	208	Clay Paky Sharpy Wash 330	SHARPY WASH	
5	(335)	1/13	E3			SP	120	ETC Source4 Fresnel	FRESNELS	R80
6	(19)	4/359	EE4	James	3	L6	208	Clay Paky Sharpy Wash 330	SHARPY WASH	
7	(40)	4/491	EE2	Bridget	7	L5	120	ETC D40 Lustr SELL40	D40s	
8	(334)	1/14	E4			SP	120	ETC Source4 Fresnel	FRESNELS	R80
9	(5)	4/125	EE5	JD	5	L6	208	Varilite VL 3500 Q Spot	3500s	
10	(343)	1/15	E5			SP	120	ETC Source4 36deg	SM SPECIALS	N/C



Instrument Schedule

Truss F

U#	Chan	Addr	Ckt	Distro	Dist Brkr	Plug	Voltage	Instrument Type	Purpose	Color & Gobo
1	(41)	1/22	F4			SP	120	PAR 64 NSP	PARS	
2	(344)	1/23	F5			SP	120	ETC Source4 36deg	SM SPECIALS	N/C
3	(323)	1/19	F1			SP	120	ETC Source4 Fresnel	FRESNELS	R21
4	(35)	5/89	FF1	Bridget	6	L5	120	ETC D40 Lustr SELL40	D40s	
5	(42)	1/24	F6			SP	120	PAR 64 NSP	PARS	
6	(15)	5/1	FF2	James	2	L6	208	Clay Paky Sharpy Wash 330	SHARPY WASH	
7	(322)	1/20	F2			SP	120	ETC Source4 Fresnel	FRESNELS	R21
8	(16)	5/23	FF2	James	2	L6	208	Clay Paky Sharpy Wash 330	SHARPY WASH	
9	(36)	5/95	FF1	Bridget	6	L5	120	ETC D40 Lustr SELL40	D40s	
10	(17)	5/45	FF2	James	2	L6	208	Clay Paky Sharpy Wash 330	SHARPY WASH	
11	(43)	1/73	Stg 73			SP	120	PAR 64 NSP		
12	(37)	5/101	FF1	Bridget	6	L5	120	ETC D40 Lustr SELL40	D40s	
13	(321)	1/21	F3			SP	120	ETC Source4 Fresnel	FRESNELS	R21



Instrument Schedule

Truss F

U#	Chan	Addr	Ckt	Distro	Dist Brkr	Plug	Voltage	Instrument Type	Purpose	Color & Gobo
14	(44)	1/74	Stg 74			SP	120	PAR 64 NSP	PARS	

Truss G

U#	Chan	Addr	Ckt	Distro	Dist Brkr	Plug	Voltage	Instrument Type	Purpose	Color & Gobo
1	(21)	4/381	GG1	James	5	L6	208	Clay Paky Sharpy	SHAPY SPOTS	
2	(11)	4/249	GG2	James	1	L6	208	Clay Paky Sharpy Wash 330	SHAPY WASHS	
3	(1)	4/1	GG6	JD	1	L6	208	Varilite VL 3500 Q Spot	3500s	
4	(326)	1/49	G1			SP	120	ETC Source4 Fresnel	FRESNELS	R21
5	(31)	4/461	GG4	Bridget	5	L5	120	ETC D40 Lustr SELL40	D40s	
6	(12)	4/271	GG2	James	1	L6	208	Clay Paky Sharpy Wash 330	SHAPY WASHS	
7	(32)	4/467	GG4	Bridget	5	L5	120	ETC D40 Lustr SELL40	D40s	
8	(325)	1/50	G2			SP	120	ETC Source4 Fresnel	FRESNELS	R21
9	(2)	4/32	GG5	JD	2	L6	208	Varilite VL 3500 Q Spot	3500s	
10	(33)	4/473	GG4	Bridget	5	L5	120	ETC D40 Lustr SELL40	D40s	



Instrument Schedule

Truss G

U#	Chan	Addr	Ckt	Distro	Dist Brkr	Plug	Voltage	Instrument Type	Purpose	Color & Gobo
11	(13)	4/293	GG2	James	1	L6	208	Clay Paky Sharpy Wash 330	SHAPY WASHS	
12	(34)	4/479	GG4	Bridget	5	L5	120	ETC D40 Lustr SELL40	D40s	
13	(324)	1/51	G3			SP	120	ETC Source4 Fresnel	FRESNELS	R21
14	(3)	4/63	GG3	JD	3	L6	208	Varilite VL 3500 Q Spot	3500s	
15	(14)	4/315	GG2	James	1	L6	208	Clay Paky Sharpy Wash 330	SHAPY WASHS	
16	(22)	4/401	GG1	James	5	L6	208	Clay Paky Sharpy	SHAPY SPOTS	



Instrument Schedule

Truss H

U#	Chan	Addr	Ckt	Distro	Dist Brkr	Plug	Voltage	Instrument Type	Purpose	Color & Gobo
			ZZ1	Bridget	1	UGR	120	Colorblast PSU	Colorblast PSU	
			ZZ3	Bridget	3	UGR	120	Scroller PSU Atomic Colors	Scroller PSU Atomic Colors	
1	(211)	2/391	ZZ1	Bridget	1	4-PIN XLR	24	Color Kinetics Colorblast 12	TRUSS WARMER	
2	(212)	2/394	ZZ1	Bridget	1	4-PIN XLR	24	Color Kinetics Colorblast 12	TRUSS WARMER	
3	(192)	1/17	17			SP	120	Altman Q Lite	BLINDER	
4	(213)	2/397	ZZ1	Bridget	1	4-PIN XLR	24	Color Kinetics Colorblast 12	TRUSS WARMER	
5	(214)	2/400	ZZ1	Bridget	1	4-PIN XLR	24	Color Kinetics Colorblast 12	TRUSS WARMER	
6	(195)	1/10	10			SP	120	Altman Q Lite	BLINDER	
7	(215)	2/403	ZZ1	Bridget	1	4-PIN XLR	24	Color Kinetics Colorblast 12	TRUSS WARMER	
8	(216)	2/406	ZZ1	Bridget	1	4-PIN XLR	24	Color Kinetics Colorblast 12	TRUSS WARMER	
9	(198)	1/9	9			SP	120	Altman Q Lite	BLINDER	
10	(217)	2/409	ZZ1	Bridget	1	4-PIN XLR	24	Color Kinetics Colorblast 12	TRUSS WARMER	
11	(218)	2/412	ZZ1	Bridget	1	4-PIN XLR	24	Color Kinetics Colorblast 12	TRUSS WARMER	



Instrument Schedule

US DECK

U#	Chan	Addr	Ckt	Distro	Dist Brkr	Plug	Voltage	Instrument Type	Purpose	Color & Gobo
1	(71)	2/1	Z5	Pablo	5	L5	120	High End TurboRay	BACK EYE CANDY	
2	(72)	2/54	Z5	Pablo	5	L5	120	High End TurboRay	BACK EYE CANDY	
3	(300)	2/415	Z6	Pablo	6	L5	120	High End Shapeshifter	BACK EYE CANDY	
4	(73)	2/107	Z5	Pablo	5	L5	120	High End TurboRay	BACK EYE CANDY	
5	(74)	2/160	Z5	Pablo	5	L5	120	High End TurboRay	BACK EYE CANDY	



Instrument Schedule

USC Wall Mount

U#	Chan	Addr	Ckt	Distro	Dist Brkr	Plug	Voltage	Instrument Type	Purpose	Color & Gobo
1	(146)	2/319	ZZ2	Bridget	2	BNC	24	Color Kinetics C-200	EYE CANDY	
2	(148)	2/325	ZZ2	Bridget	2	BNC	24	Color Kinetics C-200	EYE CANDY	
2	(147)	2/322	ZZ2	Bridget	2	BNC	24	Color Kinetics C-200	EYE CANDY	
3	(149)	2/328	ZZ2	Bridget	2	BNC	24	Color Kinetics C-200	EYE CANDY	
5	(196)	1/28	28			BNC	120	Altman Q Lite	BLINDER	
6	(82)	2/229	Z6	Pablo	6	L5	120	GLP Impression FR1	EYE CANDY	
7	(150)	2/331	ZZ2	Bridget	2	BNC	24	Color Kinetics C-200	EYE CANDY	
8	(151)	2/334	ZZ2	Bridget	2	BNC	24	Color Kinetics C-200	EYE CANDY	
9	(152)	2/337	ZZ2	Bridget	2	BNC	24	Color Kinetics C-200	EYE CANDY	
10	(153)	2/340	ZZ2	Bridget	2	BNC	24	Color Kinetics C-200	EYE CANDY	
11	(197)	1/84	84			BNC	120	Altman Q Lite	AUDIENCE BLINDER	



Instrument Schedule

USL Wall Mount

U#	Chan	Addr	Ckt	Distro	Dist Brkr	Plug	Voltage	Instrument Type	Purpose	Color & Gobo
1	(154)	2/343	ZZ2	Bridget	2	BNC	24	Color Kinetics C-200	EYE CANDY	
1	(162)	2/367	ZZ2	Bridget	2	BNC	24	Color Kinetics C-200	EYE CANDY	
2	(155)	2/346	ZZ2	Bridget	2	BNC	24	Color Kinetics C-200	EYE CANDY	
2	(163)	2/370	ZZ2	Bridget	2	BNC	24	Color Kinetics C-200	EYE CANDY	
3	(156)	2/349	ZZ2	Bridget	2	BNC	24	Color Kinetics C-200	EYE CANDY	
3	(164)	2/373	ZZ2	Bridget	2	BNC	24	Color Kinetics C-200	EYE CANDY	
4	(157)	2/352	ZZ2	Bridget	2	BNC	24	Color Kinetics C-200	EYE CANDY	
4	(165)	2/376	ZZ2	Bridget	2	BNC	24	Color Kinetics C-200	EYE CANDY	
5	(199)	1/27	27			BNC	120	Altman Q Lite	BLINDER	
5	(201)	1/18	18			BNC	120	Altman Q Lite	BLINDER	
6	(166)	2/379	ZZ2	Bridget	2	BNC	24	Color Kinetics C-200	EYE CANDY	
6	(83)	2/245	Z6	Pablo	6	L5	120	GLP Impression FR1	EYE CANDY	
7	(158)	2/355	ZZ2	Bridget	2	BNC	24	Color Kinetics C-200	EYE CANDY	
7	(167)	2/382	ZZ2	Bridget	2	BNC	24	Color Kinetics C-200	EYE CANDY	



Instrument Schedule

USL Wall Mount

U#	Chan	Addr	Ckt	Distro	Dist Brkr	Plug	Voltage	Instrument Type	Purpose	Color & Gobo
8	(159)	2/358	ZZ2	Bridget	2	BNC	24	Color Kinetics C-200	EYE CANDY	
8	(168)	2/385	ZZ2	Bridget	2	BNC	24	Color Kinetics C-200	EYE CANDY	
9	(160)	2/361	ZZ2	Bridget	2	BNC	24	Color Kinetics C-200	EYE CANDY	
9	(169)	2/388	ZZ2	Bridget	2	BNC	24	Color Kinetics C-200	EYE CANDY	
10	(161)	2/364	ZZ2	Bridget	2	BNC	24	Color Kinetics C-200	EYE CANDY	
10	(112)	2/266	ZZ3	Bridget	3	4-PIN XLR	208	Atomic Colors	STROBE	
10	(112)	2/267	Z3	Pablo	4	L6	208	Martin Atomic 3000 DMX	STROBE	
11	(200)	1/82	82			BNC	120	Altman Q Lite	AUDIENCE BLINDER	



Instrument Schedule

USR Wall Mount

U#	Chan	Addr	Ckt	Distro	Dist Brkr	Plug	Voltage	Instrument Type	Purpose	Color & Gobo
1	(138)	2/295	ZZ2	Bridget	2	BNC	24	Color Kinetics C-200	EYE CANDY	
2	(139)	2/298	ZZ2	Bridget	2	BNC	24	Color Kinetics C-200	EYE CANDY	
2	(130)	2/271	ZZ2	Bridget	2	BNC	24	Color Kinetics C-200	EYE CANDY	
3	(140)	2/301	ZZ2	Bridget	2	BNC	24	Color Kinetics C-200	EYE CANDY	
3	(131)	2/274	ZZ2	Bridget	2	BNC	24	Color Kinetics C-200	EYE CANDY	
4	(191)	1/87	87			BNC	120	Altman Q Lite	BLINDER	
4	(141)	2/304	ZZ2	Bridget	2	BNC	24	Color Kinetics C-200	EYE CANDY	
4	(132)	2/277	ZZ2	Bridget	2	BNC	24	Color Kinetics C-200	EYE CANDY	
5	(193)	1/85	85			BNC	120	Altman Q Lite	BLINDER	
5	(133)	2/280	ZZ2	Bridget	2	BNC	24	Color Kinetics C-200	EYE CANDY	
5	(134)	2/283	ZZ2	Bridget	2	BNC	24	Color Kinetics C-200	EYE CANDY	
6	(135)	2/286	ZZ2	Bridget	2	BNC	24	Color Kinetics C-200	EYE CANDY	
6	(81)	2/213	Z6	Pablo	6	L5	120	GLP Impression FR1	EYE CANDY	



Instrument Schedule

USR Wall Mount

U#	Chan	Addr	Ckt	Distro	Dist Brkr	Plug	Voltage	Instrument Type	Purpose	Color & Gobo
7	(194)	1/86	86			BNC	120	Altman Q Lite	BLINDER	
7	(142)	2/307	ZZ2	Bridget	2	BNC	24	Color Kinetics C-200	EYE CANDY	
7	(136)	2/289	ZZ2	Bridget	2	BNC	24	Color Kinetics C-200	EYE CANDY	
8	(143)	2/310	ZZ2	Bridget	2	BNC	24	Color Kinetics C-200	EYE CANDY	
8	(137)	2/292	ZZ2	Bridget	2	BNC	24	Color Kinetics C-200	EYE CANDY	
9	(144)	2/313	ZZ2	Bridget	2	BNC	24	Color Kinetics C-200	EYE CANDY	
9	(111)	2/261	ZZ3	Bridget	3	4-PIN XLR	208	Atomic Colors	STROBE	
9	(111)	2/262	Z4	Pablo	3	L6	208	Martin Atomic 3000 DMX	STROBE	
12	(145)	2/316	ZZ2	Bridget	2	BNC	24	Color Kinetics C-200	EYE CANDY	